


Sensor switch



CS1-T Series



Dimensions

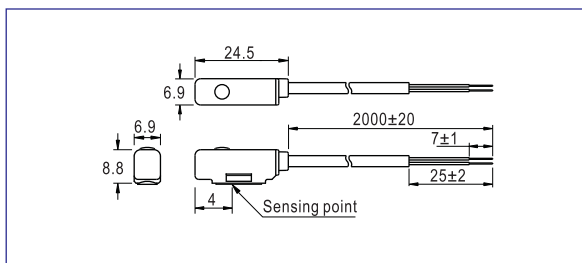

Specification

Item/Type	CS1-T	CS1-TX
Switch logic	STSP Normally opened type	
Switch type	Reed switch with contact	
Operating voltage(V)	5~240V AC/DC	
Max. Switching current(mA)	100	
Switching rating(W)	Max. 10	
Current consumption	No	
Voltage drop	2.5V Max. @100mA DC	
Cable	Φ3.3,2C Gray oil resistant PVC (Flame retarded)	
Indicator	Red LED	No
Leakage current	No	
Sensitivity(Gauss)	55~65	
Max. Frequency(Hz)	200	
Shock(m/s ²)	300	
Vibration(m/s ²)	90	
Temperature range(°C) ①	-10~70	
Enclosure classification	IP67(NEMA6)	
Protection circuit	No	

① Note: Please contact us for high temperature resistant(125°C), low temperature resistant(-40~-25°C) and explosion-proof sensor switch.

Ordering code

CS1 T X 020 A 32

- **Number of sensor switch**
 - CS1: Sensor switch
- **Specification of sensor switch**

Specification	Product Series
T: T type	TWG
- **Model of sensor switch**

Blank: two-line magnetic spring pipe with contact/normally opened
X: two-line magnetic spring pipe with contact, without indicator light/normally opened
- **Bore size**

32: Φ32mm
40: Φ40mm
50: Φ50mm
- **Body material**

A: Aluminum alloy

- **Connecting way** ①

C08: M8 quick joint, length of wire is 150mm
C12: M12 quick joint, length of wire is 150mm
020: length of wire is 2m
030: length of wire is 3m
050: length of wire is 5m
100: length of wire is 10m

① Note: The quick joint that is attached at the end of wire is three-needle-male joint-linear-rotary screw thread type. The female joint plug has to be ordered additionally. Please refer to P442 for the specific data.

Mounting

Installation example	Installation method
	<p>No additional accessories are necessary for the sensor switch of CS1-T, CS1-TX series. It can be directly fixed onto the cylinder, which is convenient and fast.</p> <p>1. Strap band round the cylinder barrel. Snap the clamping screw into button orifice and adjust it to the proper position. Properly tighten the clamping screw to fix.</p>

