



BM520



BM520D

## Ordering Code


BM	520	D	F
Code	Series	Coil and Type	Joint
	520: 5/2 way 530: 5/3 way	Blank: Single coil and double position D: Double coils and double position T: Double coils triple position	1 F-20 F

## Specification


Model	BM520	BM520D	BM520T
Valve Type	5/2 way		5/3 way
Effective Cross Section Area	16 mm <sup>2</sup> (CV=0.89)		12 mm <sup>2</sup> (CV=0.67)
Working Medium	40 Micron Filtered Air		
Operation	Internal Piloted		
Working-pressure	0.15 ~ 0.8 MPa		
Max. Test Pressure	1.2 MPa		
Max. Ambient Temperature	5 ~ 50 °C		
Operating Voltage Tolerance	± 10%		
Power Consumption	AC: 5.5 VA DC: 4.8 W		
Protect Class	F Class, IP 65		
Wiring / Connector	Cable / Lead Wire or DIN Connector		
Switching Frequency	5 Cycles / Sec.		
Response Time	0.05秒		

## Overall Dimension


### BM520

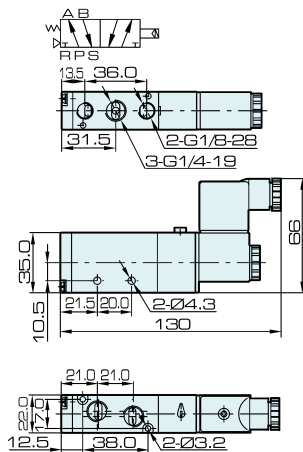

### BM520D

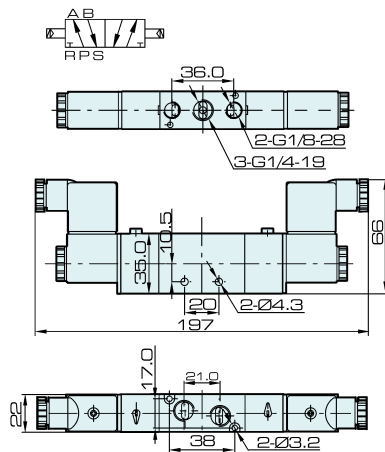

### BM530T

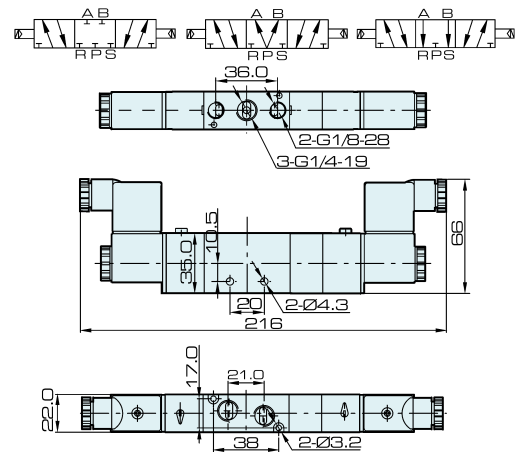

## Valve

DJF  
JELMP  
JELP/G  
MCS  
4V100  
4V200  
4V300  
4V400  
Manifold  
SV  
3V1  
JEL  
3VJZF  
4VJZF  
MVSD  
VF, VZ

## BM

Diaphragm  
Coil  
2V  
2W  
2W(Big)  
2P  
2L  
VX  
PU  
PU225  
2Q  
JEL5404  
JEL6213  
BU  
Pulse  
JELJZF  
4H  
TSV  
MPV  
4HV  
HV, K  
4R  
FV  
MSV  
JM  
ASC, RE  
QE, QEA  
ST  
HSV